


DUO ECCENTRIC BUTTERFLY VALVE

HIGH PERFORMANCE BUTTERFLY VALVE WITH LESS OPERATIONAL TORQUE.

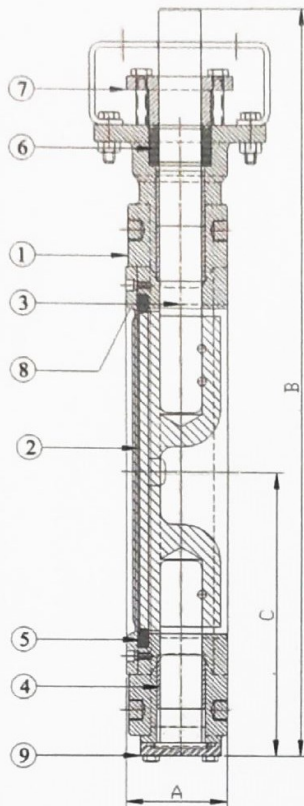

PART NO.	DESCRIPTION	MATERIAL
1	BODY	SG IS:1865 GR 500/7
2	DISC	SG IS:1865 GR 500/7
3	SHAFT	SS 410/SS 431
4	BUSH	IS:318 LTB2
5	LINER	NITRILE RUBBER
6	PACKING	GRAPHITE ASBESTOS
7	GLAND	SG IS:1865 GR 500/7
8	CLAMPING RING	SS410

SPECIFICATION

1. DUAL ECCENTRIC WAFER TYPE BUTTERFLY VALVE
2. MANUFACTURING STANDARD : IS : 13095.
3. VALVE MOUNTING BETWEEN FLANGE IS:1538 /ANSI16.5CL150/BSTABLE10 D
4. VALVE SUITABLE FOR MAXIMUM TEMPERATURE 80 °C
5. PRESSURE RATING : PN25 – PN40

NOMINAL SIZE	A±1	B±4	C±4
50 NB	43	263	67
65 NB	46	267	75
80 NB	46	280	98
100 NB	53	315	112
125 NB	56	332	125
150 NB	56	415	131
200 NB	73	521	197
250 NB	83	552	238
300 NB	92	705	265

NOTE:

1. ALL DIMENSION ARE IN mm UNLESS OTHERWISE STATED.
2. MATERIAL CAN BE CHANGED AS PER CUSTOMER REQUIREMENT.

DUO ECCENTRIC BUTTERFLY VALVE


VALVES